


LAMP PHOTOMETRIC REPORT

MODEL: 92EL67054040/WH		
POWER: 40W	VOLTAGE: 230V	WORKING VOLTAGE: 230V
MANUFACTURER: Elmark Industries JSC		

TOTAL FLUX: 4419.4 lm

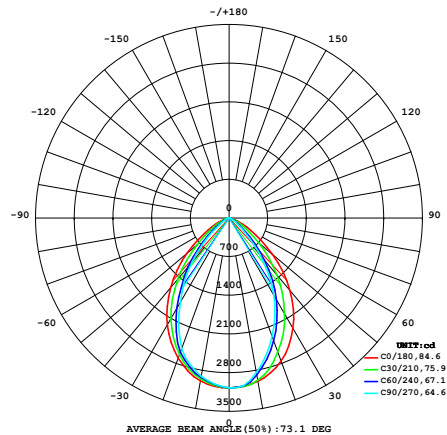

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%
10	2999	2939	2839	2947	2993	2940	2910	2943	0- 10	287.3	287.3	6.5
20	2756	2467	2282	2446	2699	2606	2514	2615	10- 20	776.7	1064	24.1
30	2309	1846	1629	1808	2243	2004	1765	2045	20- 30	1039	2103	47.6
40	1717	1167	873.6	1128	1654	1263	1049	1304	30- 40	1003	3106	70.3
50	1024	527.8	296.0	517.4	989.9	615.6	402.0	637.0	40- 50	713.5	3819	86.4
60	458.1	190.5	109.9	188.7	443.7	228.4	131.1	235.1	50- 60	363.5	4183	94.6
70	159.9	72.44	50.92	74.76	158.7	84.74	59.15	84.84	60- 70	155.2	4338	98.2
80	52.50	29.22	21.15	30.78	53.46	33.59	25.67	33.49	70- 80	62.67	4401	99.6
90	1.292	1.136	0.7009	1.109	1.146	2.407	9.922	2.773	80- 90	18.60	4419	100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: MEDIUM  
Temperature:25.3°C  
Operators:  
Test Date:07 December 2022

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 2.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:6.265m [K=1.0000]  
Remarks:



```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```