


LAMP PHOTOMETRIC REPORT

MODEL: 92EL92EL67054065/WH67054040/WH		
POWER: 40W	VOLTAGE: 230V	WORKING VOLTAGE: 230V
MANUFACTURER: Elmark Industries JSC		

TOTAL FLUX: 4525.8 lm

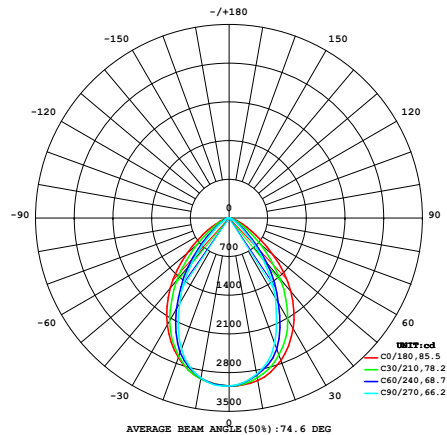

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	2985	2904	2872	2891	2951	2951	2942	2973	0- 10	285.1	285.1	6.3
20	2742	2596	2414	2553	2688	2633	2522	2664	10- 20	785.8	1071	23.7
30	2314	1960	1681	1913	2242	2033	1787	2071	20- 30	1062	2133	47.1
40	1738	1224	927.4	1181	1657	1285	1042	1320	30- 40	1028	3162	69.9
50	1041	566.7	327.7	551.5	992.7	622.4	405.4	638.9	40- 50	733.3	3895	86.1
60	465.9	204.7	121.9	204.6	448.0	235.6	144.9	242.2	50- 60	377.2	4272	94.4
70	163.0	81.41	57.01	82.45	167.0	91.71	71.29	94.97	60- 70	164.7	4437	98
80	55.87	32.49	23.48	33.40	55.69	37.19	29.22	37.78	70- 80	68.37	4505	99.5
90	1.379	1.176	0.7777	1.157	1.223	2.627	8.296	2.349	80- 90	20.77	4526	100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: MEDIUM
Temperature:25.3°C
Operators:
Test Date:08 December 2022

γ Range: 0 - 90DEG
 γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```