

# Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	41.7 cd per klm.
(Luminaire orientation as tested.)	-2.0 degrees vertical
	-10.0 degrees horizontal

Beam Spread	At 10% of Imax	112.4V x 65.0H
	At 50% of Imax	20.4V x 15.8H
	At 90% of Imax	10.9V x 4.1H

Beam Flux	Total	20.8 lumens per klm.
	To 10% of Imax	18.0 lumens per klm.
	To 50% of Imax	5.0 lumens per klm.
	To 90% of Imax	0.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	2.1 %


Luminaire Efficiency (Light Output Ratio)	2.1 %
---	-------

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators:  
Test Date: 06 October 2022

γ Range: 0 - 90DEG  
γ Interval: 2.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 6.265m [K=1.0000]  
Remarks:

## LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

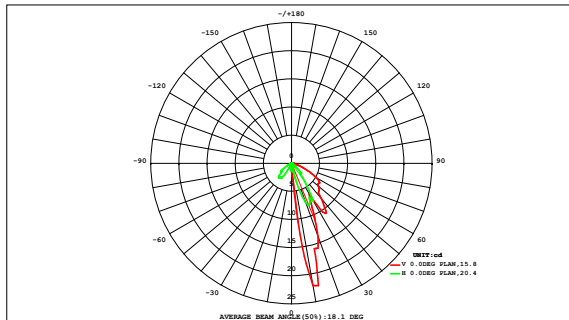

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	96GRFLED069/T1	Imax (cd)	22.54
NOMINAL POWER (W)	3	AVAILABILITY (%)	1.8
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	9.707
NOMINAL FLUX (lm)	180	LOR (%)	2.1
LAMPS INSIDE	3	TOTAL FLUX (lm)	11.25
TEST VOLTAGE (V)	230	θ @50% (H,V)	16,20DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
90	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
80	0.00	0.00	0.01	0.01	0.02	0.03	0.02	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.00
70	0.00	0.00	0.01	0.02	0.04	0.05	0.04	0.06	0.07	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	0.07
60	0.00	0.00	0.02	0.03	0.05	0.06	0.09	0.12	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.39
50	0.00	0.01	0.02	0.05	0.06	0.10	0.16	0.16	0.14	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.68
40	0.00	0.01	0.03	0.08	0.10	0.18	0.18	0.26	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	0.92
30	0.00	0.01	0.04	0.10	0.15	0.28	0.23	0.38	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.31	1.27
20	0.00	0.01	0.04	0.10	0.16	0.26	0.26	0.50	0.18	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.52	1.47
10	0.00	0.01	0.04	0.10	0.15	0.23	0.24	0.48	0.30	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.57	1.52
0	0.00	0.01	0.04	0.10	0.13	0.22	0.21	0.36	0.33	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.45	1.41
-10	0.00	0.01	0.04	0.09	0.10	0.13	0.21	0.21	0.29	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	1.15
-20	0.00	0.01	0.03	0.06	0.07	0.07	0.13	0.15	0.14	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.73	0.67
-30	0.00	0.00	0.02	0.04	0.05	0.05	0.05	0.06	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	0.15
-40	0.00	0.00	0.01	0.02	0.04	0.04	0.04	0.02	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.00
-50	0.00	0.00	0.01	0.01	0.02	0.03	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.00
-60	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
-70	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.01	0.08	0.36	0.84	1.15	1.75	1.91	2.80	1.91	0.40	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	11	---
Φ a	0.00	0.00	0.21	0.69	0.96	1.48	1.72	2.70	1.76	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	10

one-half-peak spread: U:6.2,D:6.9 , L:5.1,R:5.9


NEMA Beam Type: Type 4 x 6 (H x V)

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature:25.3°C  
Operators:  
Test Date:06 October 2022

γ Range: 0 - 90DEG  
γ Interval: 2.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
Humidity:65.0%  
Test Distance:6.265m [K=1.0000]  
Remarks:

# ISOCANDELA DIAGRAM

NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

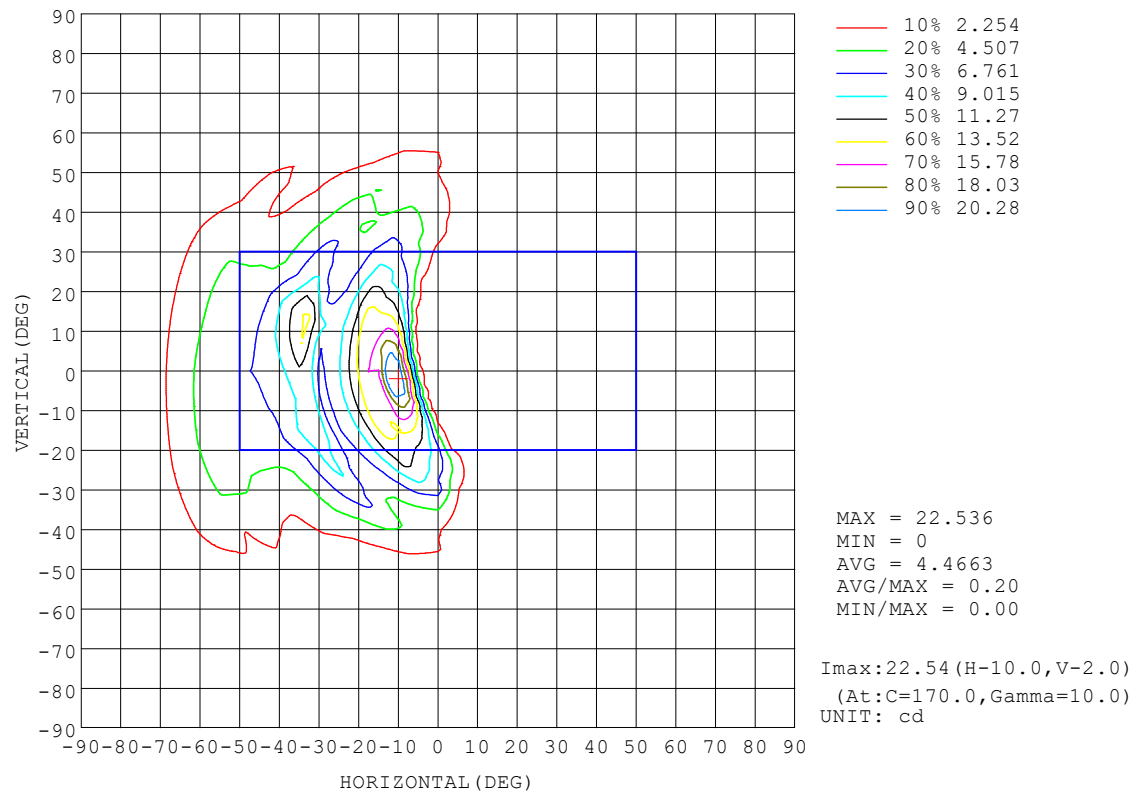


C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators:  
Test Date: 06 October 2022

γ Range: 0 - 90DEG  
γ Interval: 2.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 6.265m [K=1.0000]  
Remarks:

## ISOLUX DIAGRAM


NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

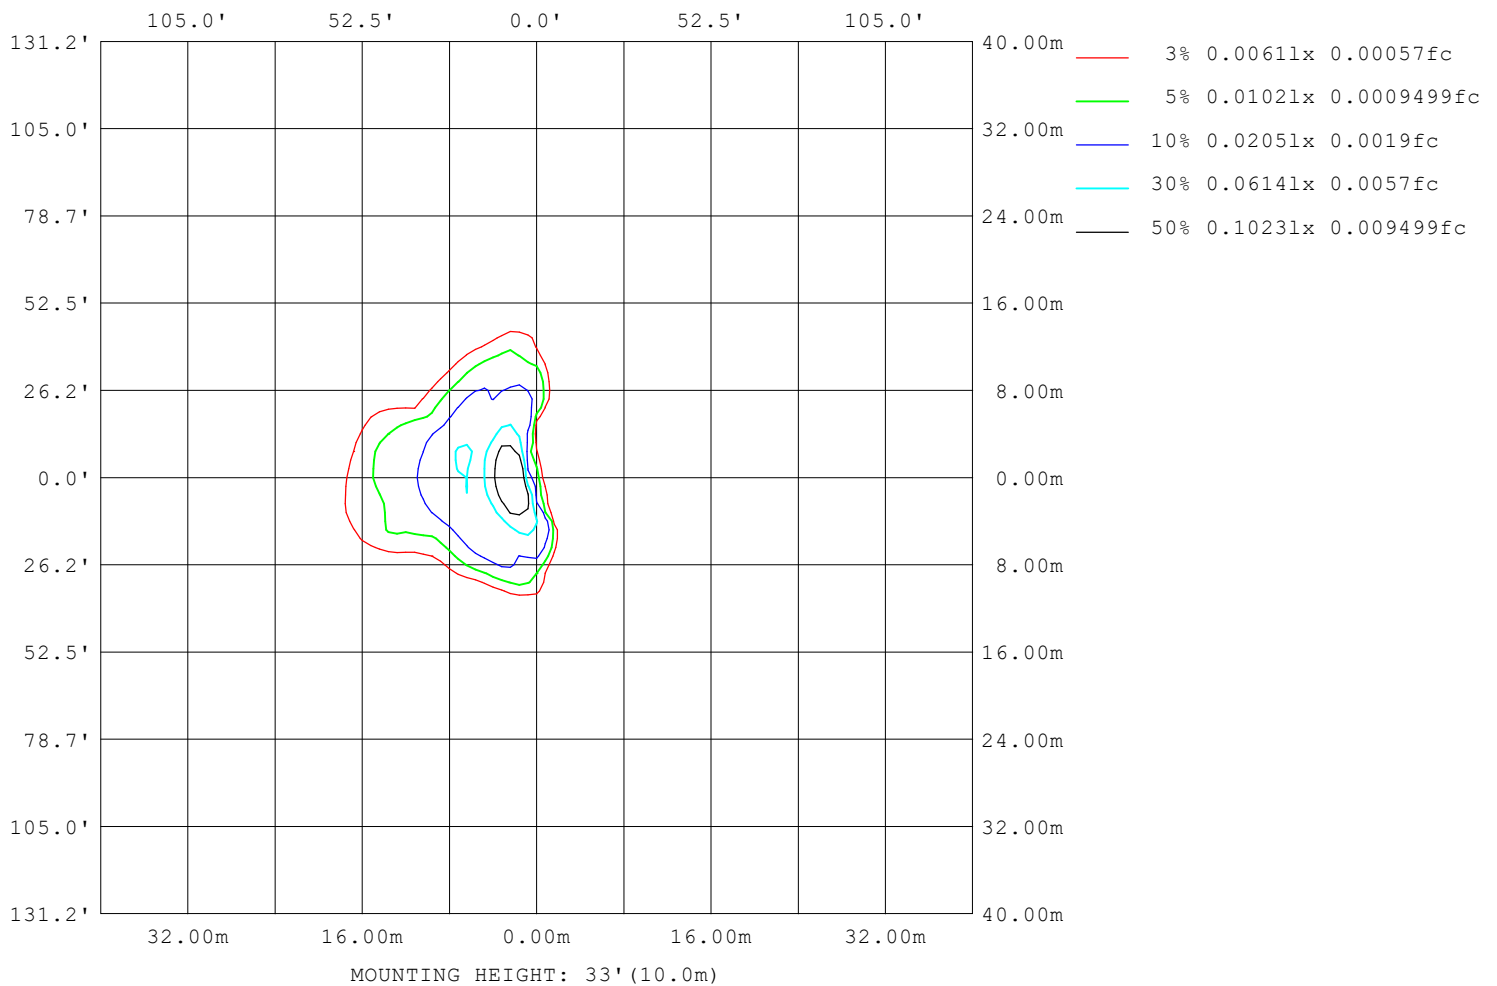

C Range: 0 - 360DEG  
C Interval: 10.0DEG  
Test Speed: HIGH  
Temperature: 25.3°C  
Operators:  
Test Date: 06 October 2022

γ Range: 0 - 90DEG  
γ Interval: 2.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
Humidity: 65.0%  
Test Distance: 6.265m [K=1.0000]  
Remarks:

# Planar Illuminance Curve

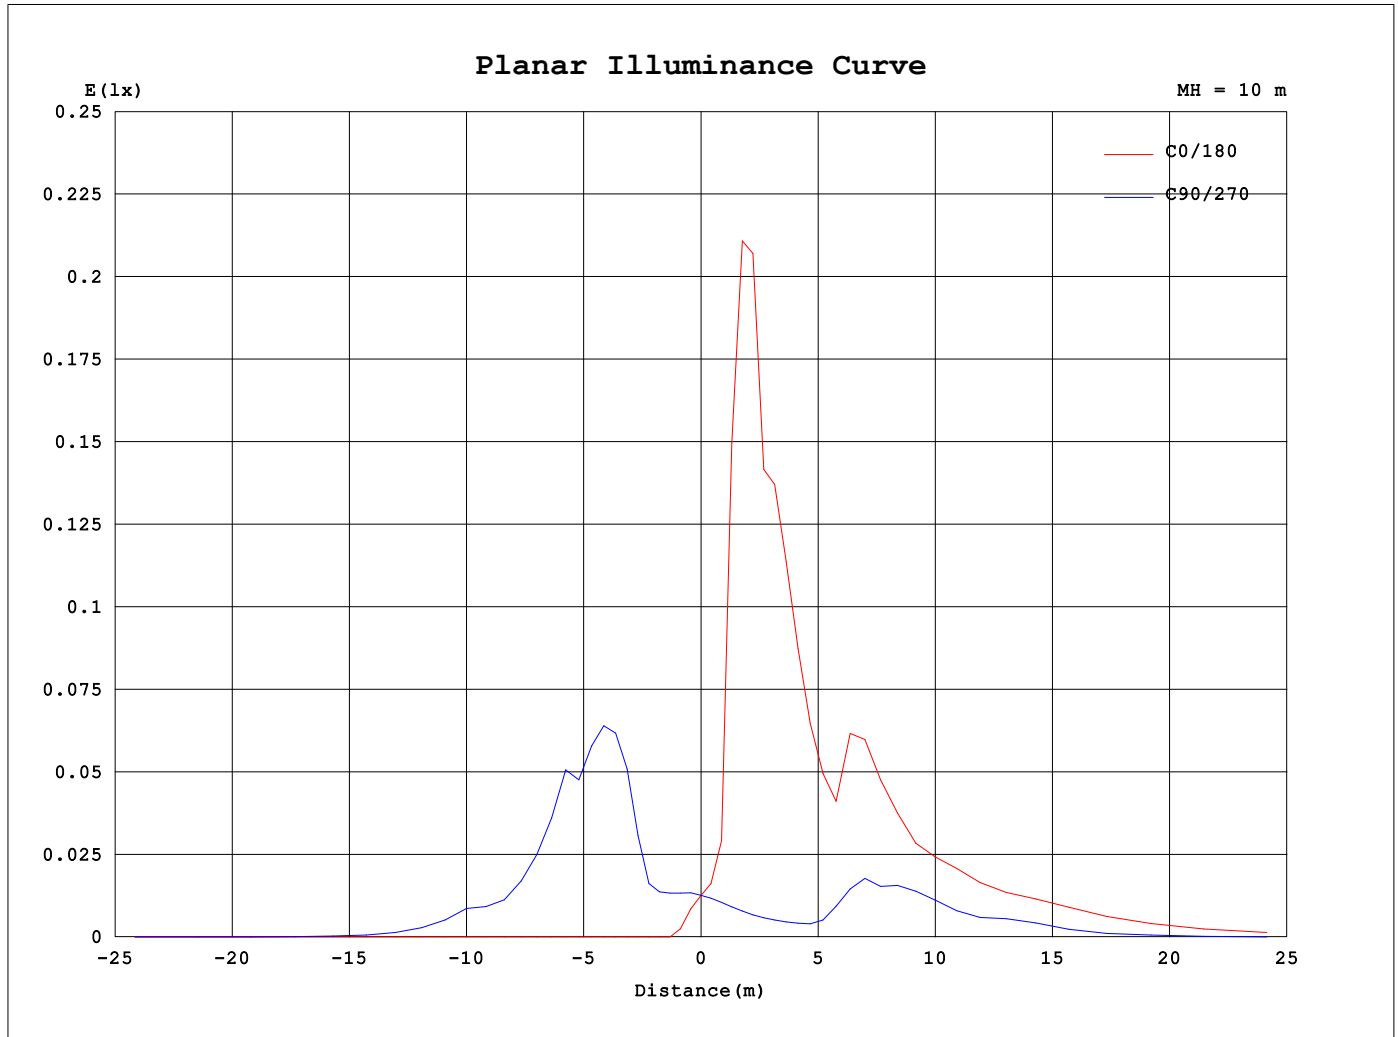


C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 06 October 2022

γ Range: 0 - 90DEG  
 γ Interval: 2.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
 Humidity: 65.0%  
 Test Distance: 6.265m [K=1.0000]  
 Remarks:

**AAI Figure**

NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

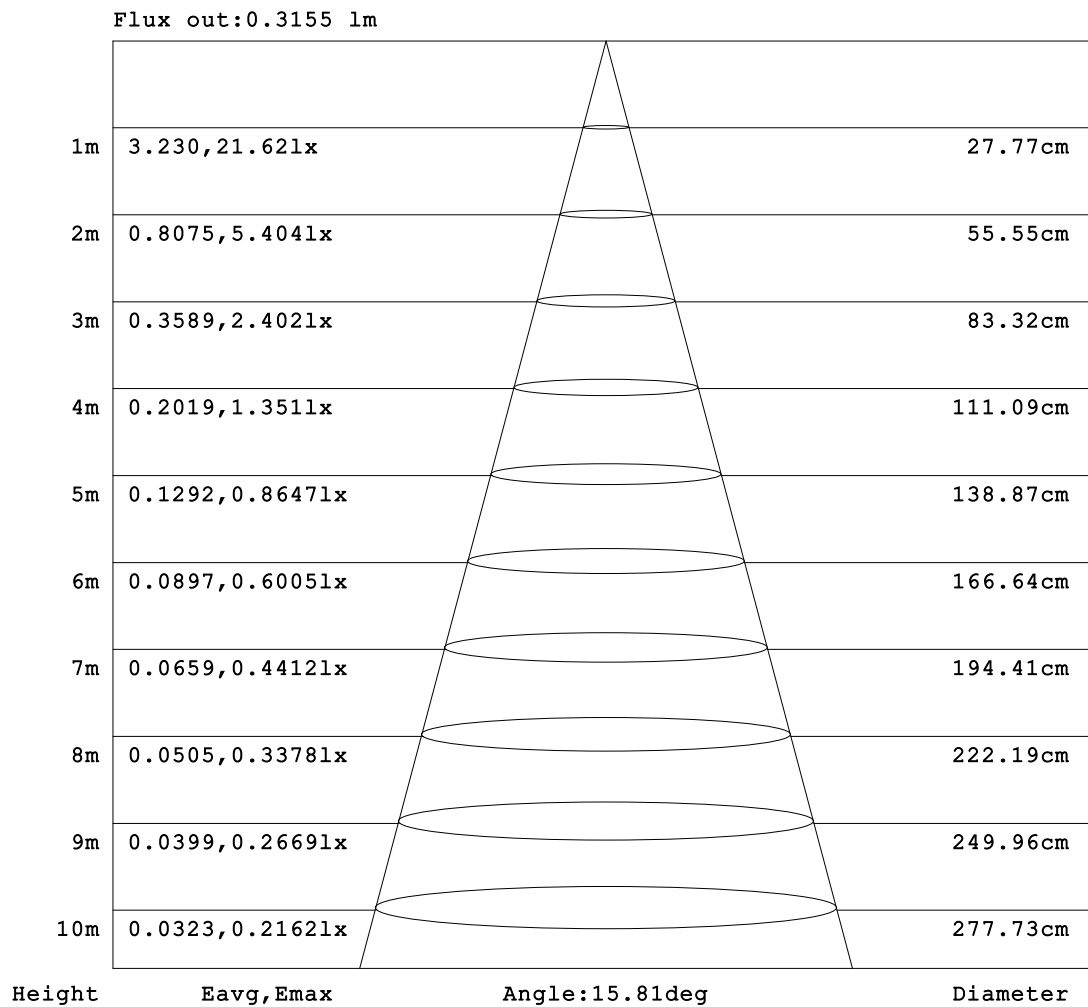

**Note:** The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 06 October 2022

γ Range: 0 - 90DEG  
 γ Interval: 2.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.00.456  
 Humidity: 65.0%  
 Test Distance: 6.265m [K=1.0000]  
 Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.22	0.23	0.25	0.26	0.27	0.30	0.33	0.35	0.36	0.37	0.37	0.33	0.28	0.19	0.09	0.05	0.00	0.00	0.00
-85	0.22	0.23	0.24	0.25	0.25	0.26	0.26	0.27	0.27	0.26	0.25	0.23	0.20	0.14	0.08	0.05	0.01	0.01	0.00
-80	0.22	0.23	0.23	0.23	0.25	0.26	0.26	0.27	0.30	0.29	0.28	0.30	0.30	0.21	0.09	0.06	0.03	0.02	0.00
-75	0.22	0.23	0.22	0.24	0.26	0.27	0.27	0.34	0.47	0.51	0.53	0.53	0.55	0.40	0.16	0.10	0.06	0.03	0.00
-70	0.22	0.22	0.22	0.24	0.28	0.30	0.33	0.48	0.60	0.75	0.88	0.94	0.94	0.68	0.26	0.13	0.09	0.05	0.01
-65	0.22	0.22	0.23	0.26	0.30	0.36	0.53	0.71	0.92	1.10	1.23	1.31	1.35	1.07	0.46	0.20	0.15	0.09	0.03
-60	0.22	0.22	0.23	0.27	0.33	0.57	0.78	0.99	1.22	1.42	1.61	1.76	1.64	1.19	0.63	0.35	0.29	0.21	0.10
-55	0.22	0.22	0.24	0.29	0.49	0.79	1.07	1.27	1.55	1.82	1.76	1.59	1.66	1.44	0.87	0.54	0.53	0.47	0.36
-50	0.22	0.22	0.25	0.31	0.67	1.03	1.41	1.68	1.95	1.84	1.83	1.97	1.74	1.27	0.94	0.95	1.19	1.24	1.09
-45	0.22	0.22	0.25	0.40	0.81	1.28	1.85	2.22	2.36	2.05	2.21	1.97	1.55	1.49	1.65	2.02	2.47	2.64	2.44
-40	0.22	0.22	0.26	0.53	0.94	1.61	2.39	2.92	2.64	2.58	2.30	1.99	2.33	2.78	3.28	4.09	4.41	3.46	2.51
-35	0.22	0.22	0.28	0.63	1.12	1.95	2.90	3.77	3.61	2.91	2.51	2.60	3.47	4.75	5.82	6.04	4.17	4.16	4.56
-30	0.22	0.22	0.30	0.70	1.29	2.33	3.44	4.66	4.78	3.62	2.99	3.72	5.14	7.07	7.45	4.89	5.69	7.42	7.80
-25	0.22	0.22	0.32	0.75	1.48	2.68	3.99	5.09	5.66	4.59	4.32	5.07	7.13	9.22	5.79	6.65	9.44	10.4	7.78
-20	0.22	0.22	0.33	0.79	1.64	2.96	4.54	5.23	5.45	5.67	5.69	7.01	9.36	7.51	6.89	9.85	13.0	11.0	7.45
-15	0.22	0.22	0.35	0.83	1.77	3.12	4.95	5.23	5.91	6.08	6.67	9.13	10.1	6.66	8.96	13.3	13.5	12.6	3.42
-10	0.22	0.22	0.36	0.86	1.84	3.22	5.09	5.47	6.25	6.50	7.08	9.59	8.72	7.41	11.2	14.6	16.8	12.7	1.44
-5	0.22	0.22	0.37	0.88	1.88	3.26	5.09	5.79	6.28	6.72	7.58	10.1	6.82	8.35	12.8	14.7	21.2	8.58	1.34
0	0.22	0.22	0.38	0.89	1.88	3.24	4.98	6.14	6.23	6.88	8.35	10.9	6.34	8.70	13.7	15.7	22.1	2.95	1.26
5	0.22	0.22	0.38	0.90	1.84	3.15	4.75	6.20	6.03	7.10	9.19	12.6	7.26	8.66	13.9	17.3	18.0	2.14	1.06
10	0.22	0.23	0.37	0.89	1.78	3.01	4.45	6.15	5.98	7.01	9.54	13.0	9.40	8.59	13.0	15.2	14.1	1.89	0.82
15	0.22	0.23	0.37	0.86	1.69	2.80	4.09	5.90	6.04	6.27	9.04	12.9	9.58	7.59	11.3	13.6	11.1	1.82	0.65
20	0.22	0.23	0.36	0.81	1.59	2.54	3.65	5.19	5.64	5.73	7.42	9.53	8.96	6.29	9.04	12.2	9.23	3.17	0.56
25	0.22	0.23	0.35	0.73	1.47	2.22	3.17	4.43	4.88	4.98	5.15	6.72	8.56	5.14	6.88	9.58	8.05	4.00	0.54
30	0.22	0.23	0.33	0.62	1.35	1.98	2.74	3.74	3.99	3.45	3.52	5.06	7.06	5.99	5.32	7.28	7.21	4.91	1.44
35	0.22	0.23	0.31	0.53	1.20	1.73	2.31	2.85	3.25	2.49	2.74	3.70	5.12	6.44	4.71	5.37	6.06	4.95	3.24
40	0.22	0.23	0.29	0.48	1.03	1.52	1.95	2.26	2.64	2.42	2.20	2.68	3.56	4.76	5.33	4.45	4.60	4.49	3.49
45	0.22	0.22	0.28	0.44	0.83	1.31	1.64	1.85	2.02	2.46	2.28	2.01	2.40	3.23	4.08	4.46	3.91	3.60	3.17
50	0.22	0.22	0.27	0.39	0.63	1.06	1.36	1.55	1.67	2.06	2.30	2.19	1.94	2.12	2.58	3.05	3.75	3.47	2.24
55	0.22	0.22	0.26	0.34	0.51	0.83	1.10	1.24	1.42	1.60	1.87	2.06	1.75	1.42	1.48	1.78	2.23	2.36	2.27
60	0.22	0.22	0.25	0.29	0.39	0.63	0.87	1.01	1.15	1.25	1.41	1.51	1.30	1.05	0.89	0.93	1.18	1.13	0.93
65	0.22	0.22	0.24	0.27	0.32	0.43	0.66	0.82	0.94	1.00	1.04	1.00	0.84	0.69	0.52	0.50	0.57	0.46	0.30
70	0.22	0.22	0.23	0.25	0.27	0.34	0.41	0.57	0.70	0.77	0.80	0.66	0.41	0.32	0.27	0.27	0.28	0.19	0.09
75	0.22	0.22	0.22	0.23	0.24	0.28	0.34	0.37	0.40	0.46	0.52	0.43	0.27	0.19	0.13	0.10	0.09	0.06	0.03
80	0.22	0.22	0.22	0.22	0.22	0.24	0.27	0.28	0.28	0.29	0.30	0.24	0.16	0.13	0.09	0.06	0.02	0.01	0.00
85	0.22	0.22	0.22	0.22	0.22	0.22	0.23	0.22	0.22	0.21	0.21	0.17	0.12	0.09	0.06	0.03	0.00	0.00	0.00
90	0.22	0.22	0.21	0.22	0.23	0.23	0.23	0.23	0.23	0.21	0.19	0.16	0.13	0.09	0.05	0.02	0.00	0.00	0.00

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3°C

Operators:

Test Date:06 October 2022

γ Range: 0 - 90DEG

γ Interval: 2.5DEG

Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:6.265m [K=1.0000]

Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 96GRFLED069/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F100 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: rectangular	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.06	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.18	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.47	0.10	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	1.00	0.26	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	1.06	0.36	0.11	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	1.83	0.57	0.16	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	2.39	0.58	0.18	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	3.41	0.62	0.17	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	1.76	0.42	0.14	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	0.75	0.34	0.10	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	0.71	0.22	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	0.56	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	0.23	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	0.25	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	0.25	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	0.31	0.13	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	0.95	0.27	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	1.40	0.40	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	1.29	0.32	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.95	0.20	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	1.03	0.19	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.42	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.14	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3°C

Operators:

Test Date:06 October 2022

γ Range: 0 - 90DEG

γ Interval: 2.5DEG

Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:6.265m [K=1.0000]

Remarks: